

DELABIE



Outdoor
Living

Campsites
Activity Parks
Swimming Pools
Theme Parks
Holiday Villages



Basins



Showers



WCs/Urinals



Hygienic Accessories

DELABIE Outdoor Living



DELABIE Solutions

Pp 2-3




Washbasin Area

Pp 4-6



Shower Area

Pp 7-11

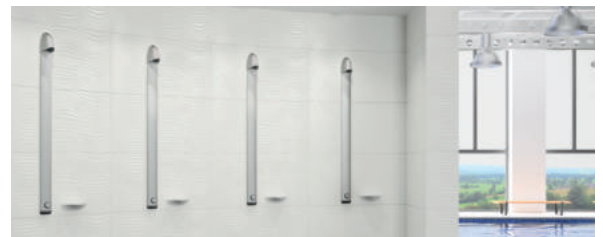


Urinal Area

Pp 12-13



WC Area

Pp 14-15

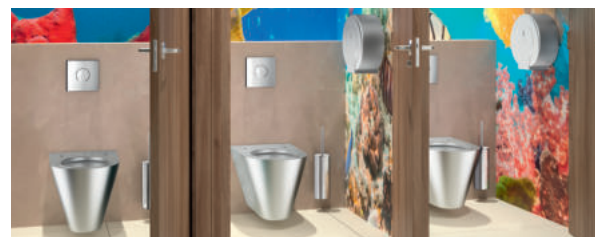

Accessibility

Pp 16-17



Utility Areas

Pp 18-19





DELABIE Solutions

DELABIE, European market leader in water controls and sanitary equipment for public and commercial places, offers complete solutions for basin, shower, urinal and WC areas.

DELABIE's diverse offering provides solutions for all the needs of the outdoor leisure industry:

Design

The expectations of public building users have changed. Where cleanliness is a must, the image of the owner or management team depends on the washroom's comfort and aesthetics. DELABIE products have sleek and timeless designs.

Water savings

Thanks to their optimised flow rates and timing parameters, DELABIE water controls deliver water savings of up to 90% compared to domestic water controls.

Easy to install

Regardless of the product chosen, DELABIE ensures that installation is easy and setting adjustments are reduced to the bare minimum to save time during installation.

Minimal servicing and maintenance

Flow straighteners and cartridges made from scale-resistant materials reduce servicing and maintenance considerably.

Vandal-resistance and intensive use

DELABIE's robust product design provides resistance to vandalism which is particularly prevalent in areas subject to intensive use. All products are subjected to performance tests to ensure that they will withstand intensive use.

SPORTING 2
shower panel
Ref. 714700



Safety

Hot water in the system is maintained at very high temperatures. All DELABIE mixers are equipped with a maximum temperature limiter to ensure user safety.

Comfort and ergonomics

DELABIE fittings are suitable for any user, regardless of their age and degree of autonomy: the use of the products is intuitive.

Hygiene

DELABIE has developed specific solutions that considerably reduce the risk of bacterial development.

Accessibility and Independence

DELABIE's whole range complies with regulatory requirements for accessibility.

Warranty

Our products are warrantied against any manufacturing defects for a period of 10 years, including electronic water controls, but with the exception of other electrical accessories (e.g. hand dryers, etc.) which have a 3-year warranty, and also those products with an expiry date.

FINO stainless steel urinal
Ref. 135710

Find out more details about all our products on [delabie.co.uk](https://www.delabie.co.uk)



Electronic tap TEMPOMATIC 4

- ◆ No manual contact: infrared presence detection
- ◆ Reduced-stagnation solenoid valve, electronic unit and batteries integrated into the tap body
- ◆ Flow rate pre-set at 3 lpm at 3 bar, can be adjusted from 1.4 to 6 lpm
- ◆ Scale-resistant flow straightener
- ◆ Duty flush (~60 seconds every 24 hours after the last use)
- ◆ Stopcock
- ◆ Also available as a mixer, with mains supply and deck-mounted installation

Wall-mounted for retrofit	
L. 130mm	443436
L. 190mm	443536
Cross wall	
L. 130mm	443416
L. 190mm	443516



Round washbasin HEMI

- ◆ Basin for recessed installation from above or below
- ◆ Bacteriostatic 304 stainless steel. Polished satin finish
- ◆ One-piece, seam-free pressed bowl
- ◆ Supplied with 1¼" waste
- ◆ Without overflow
- ◆ CE marked. Complies with European standard EN 14688

Ø 310mm	120470
Ø 385mm	120490



Electronic liquid soap dispenser

- ◆ No manual contact: hands are automatically detected by infrared cell
- ◆ One-piece hinged cover with lock and standard DELABIE key
- ◆ No waste pump dispenser
- ◆ Low battery indicator light
- ◆ Soap level control window
- ◆ Tank with large opening: easy to refill
- ◆ Compatible with hydroalcoholic gel
- ◆ CE marked


Bright polished 304 stainless steel, 1L	512066P
Pol. satin 304 st. steel, 1L	512066S
White powder-coated 304 stainless steel, 1L	512066W
Matte black powder-coated 304 stainless steel, 1L	512066BK



Compact hand dryer HIGHFLOW

- ◆ High speed: dries in 10 to 12 seconds
- ◆ Choice of warm or cold air
- ◆ Infrared automatic activation
- ◆ Stops automatically when hands are removed
- ◆ Anti-blocking: stops automatically if used continuously for more than 60 seconds
- ◆ One-piece cover made from bacteriostatic 304 stainless steel
- ◆ Low energy consumption: 1,350W
- ◆ CE marked

Bright polished 304 st. steel	510622
Pol. satin 304 st. steel	510622S
White powder-coated 304 stainless steel	510622W
Matte black powder-coated 304 stainless steel	510622BK

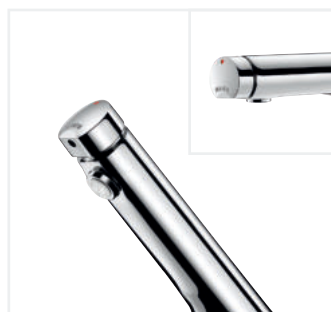

Time flow tap
TEMPOSOF 2

- Soft-touch operation
- Time flow ~7 seconds
- Flow rate pre-set at 3 lpm at 3 bar, can be adjusted from 1.4 to 6 lpm
- Tamperproof scale-resistant flow straightener
- Chrome-plated solid brass body M1/2"
- Also available as a mixer



Wash trough
CANAL

- Bacteriostatic 304 stainless steel. Polished satin finish
- Easy to install: no joint concealers to install, lightweight wash trough
- Taps can be installed wall-mounted or deck-mounted
- Drainage on the right
- Supplied with 1 1/2" waste and fixings. Without overflow
- CE marked. Complies with European standard EN 14296
- Available in different lengths: 600mm, 2,400mm and 3,000mm. Available with tap holes and drainage on the left. It is possible to add a bacteriostatic 304 stainless steel splashback



Thermostatic mixing valve
PREMIX NANO

- Supplies 1 to 2 taps or 1 shower
- Anti-scalding safety: automatic shut-off if cold or hot water supply fails
- Temperature pre-set at 38°C, installer can adjust from 34 to 60°C
- Filters and non-return valves
- Minimum operating flow rate: 3 lpm
- Thermal shocks are possible
- Inlets and outlets M1/2, Ø 15mm

Deck-mounted	
Fixing reinforced by back-nut with 3 stainless steel screws	740300
Fixing with back-nut	740500
Wall-mounted	
L. 110mm	741500
L. 150mm	741550

L. 1200mm	120250
L. 1400mm	120260
L. 1800mm	120280

Nickel-plated body	732115
Polished chrome-plated body	732116

Washbasin Area | time flow



Time flow mixer TEMPOMIX 3

- ◆ Soft-touch operation
- ◆ Temperature control and operation via the push-button
- ◆ Time flow ~7 seconds
- ◆ Flow rate pre-set at 3 lpm at 3 bar, can be adjusted from 1.4 to 6 lpm
- ◆ Chrome-plated solid brass body
- ◆ Filters and non-return valves
- ◆ Adjustable temperature limiter

Deck-mounted	
With stopcocks, Ø 15mm for compression fittings	79400015
Without stopcocks, F3/8"	794100
Wall-mounted	
L. 110mm	794050
L. 190mm	794055
Cross wall	
L. 110mm	794160
L. 190mm	794165



Stainless steel mirror

- ◆ "Mirror" polished bacteriostatic 304 stainless steel
- ◆ Reinforced by a concealed, solid PVC plate 10mm thick
- ◆ 5 fixing points
- ◆ Concealed fixings
- ◆ Unbreakable

10 × 385 × 485mm	3452
10 × 485 × 585mm	3458
10 × 595 × 980mm	3459



Stainless steel bin

- ◆ Wall-mounted bin for used paper towels
- ◆ Robust model
- ◆ Bacteriostatic 304 stainless steel
- ◆ Stainless steel thickness: 1mm

Bright pol. 304 st. steel, 25L	510461P
Pol. satin 304 st. steel, 25L	510461S
Bright pol. 304 st. steel, 38L	510463P
Pol. satin 304 st. steel, 38L	510463S



Liquid soap dispenser

- ◆ Push-button with soft-touch operation
- ◆ One-piece hinged cover with standard DELABIE lock and key
- ◆ No waste, non-drip pump-action dispenser
- ◆ Anti-blocking: single dose per press even when the button is pressed for long periods
- ◆ Soap level control window
- ◆ Tank with large opening: easy to refill
- ◆ Tank prevents long-term stagnation of soap
- ◆ Compatible with hydroalcoholic gel

Bright pol. 304 st. steel, 1L	510580
Pol. satin 304 st. steel, 1L	510582
White powder-coated 304 stainless steel, 1L	510581



NEW

Electronic shower panel SPORTING 2

- ◆ No manual contact: infrared presence detection, shower starts when hand is moved towards the sensor (detection distance ~4cm)
- ◆ Anodised aluminium and chrome-plated satin finish
- ◆ Adjustable connector for top or back inlets
- ◆ Slimline structure with concealed fixings
- ◆ Shuts off on demand or automatically after ~60 seconds
- ◆ Duty flush (~60 seconds every 24 hours after the last use)
- ◆ Tamperproof, scale-resistant fixed shower head with automatic flow rate regulation
- ◆ Flow rate 6 lpm at 3 bar
- ◆ Integrated filter and stopcock are accessible
- ◆ M $\frac{1}{2}$ " connection for mixed water supply

With scale-resistant shower head

Mains supply	714800
Battery-operated	714806

With rain-effect shower head

Mains supply	714800DP
Battery-operated	714806DP



Floor trap

- ◆ For hard floors (tiles or concrete)
- ◆ Flow rate 36 lpm (standard)
- ◆ Water level 50mm
- ◆ Bright polished stainless steel grid
- ◆ Adjustable height
- ◆ Ø 43mm horizontal outlet integrated into the height of the floor trap
- ◆ Integrated waterproof collar
- ◆ Classified non-flammable (American certification UL94)

Grid 150 × 150mm	683001UK
Grid 100 × 100mm	682001UK



Coat hook

- ◆ Bacteriostatic 304 stainless steel
- ◆ Concealed fixings
- ◆ Ø 18 × 40mm

Bright pol. 304 st. steel	510047P
Pol. satin 304 st. steel	510047S
White powder-coated 304 stainless steel	510047W



Thermostatic time flow shower panel SECURITHERM

- Soft-touch operation
- Time flow ~30 seconds
- Anodised aluminium shower panel for wall-mounted, exposed installation
- SECURITHERM thermostatic mixer
- Adjustable temperature control from cold water up to 38°C with 1st limiter set at 38°C and 2nd limiter set at 41°C.
- Anti-scalding failsafe: automatic shut-off if cold water supply fails
- Anti-cold showers function: automatic shut-off if hot water fails
- Thermal shocks are possible
- Chrome-plated, tamperproof, scale-resistant ROUND shower head
- Flow rate 6 lpm at 3 bar
- Top inlet
- Stopcocks M $\frac{1}{2}$ " with filters and non-return valves
- Concealed fixings


With soap dish	792305
Without soap dish	79230015



Floor trap

- For hard floors (tiles or concrete floors)
- Flow rate 36 lpm (standard)
- Water level 50mm
- Bright polished stainless steel grid
- Adjustable height
- Ø 43mm horizontal outlet integrated into the height of the floor trap
- Integrated waterproof collar
- Classified non-flammable (American certification UL94)

Grid 150 × 150mm	683001UK
Grid 100 × 100mm	682001UK

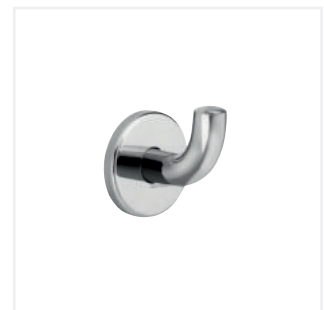

Single coat hook

- Bacteriostatic 304 stainless steel
- Concealed fixings
- Tube Ø 20mm, 1mm thick

Short model - L. 65mm	
Bright pol. 304 st. steel	4043P
Pol. satin 304 st. steel	4043S
White powder-coated 304 stainless steel	4043EW
Black powder-coated 304 stainless steel	4043BK
Long model - L. 100mm	
Bright pol. 304 st. steel	4047P
White powder-coated 304 stainless steel	4047EW




Time flow mixer TEMPOMIX 3

- ◆ Soft-touch operation
- ◆ Temperature control and operation via the push-button
- ◆ Time flow ~30 seconds
- ◆ Flow rate pre-set at 6 or 9 lpm at 3 bar, can be adjusted
- ◆ Chrome-plated solid brass body
- ◆ Filters and non-return valves
- ◆ Adjustable temperature limiter



Floor trap

- ◆ For hard floors (tiles or concrete)
- ◆ Flow rate 36 lpm (standard)
- ◆ Water level 50mm
- ◆ Bright polished stainless steel grid 100 × 100mm
- ◆ Adjustable height up to 80mm
- ◆ Ø 43mm horizontal outlet integrated into the height of the floor trap
- ◆ Integrated waterproof collar
- ◆ Classified non-flammable (American certification UL94)

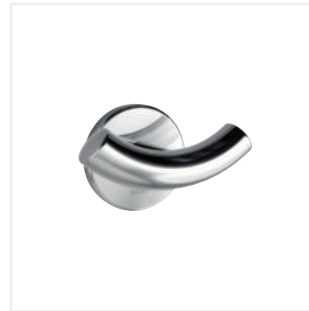

Double coat hook

- ◆ Bacteriostatic 304 stainless steel
- ◆ Concealed fixings
- ◆ Tube Ø 20mm, 1mm thick



BIOFIL anti-Legionella and all-germ filter

- ◆ For shower panels or wall-mounted showers
- ◆ Immediate protection from nosocomial infections originating in water
- ◆ Tubular membrane with 0.1µm porosity nominal sterilising grade
- ◆ Filtration area: 1,400cm²
- ◆ Filtration rate: 5.5 lpm at 3 bar
- ◆ Maximum upstream pressure at point-of-use: 5 bar
- ◆ Maximum lifespan: 2 months after installation
- ◆ Non-sterile medical device, CE class I
- ◆ Straight flow version is also available to fit on water control


Shower kit	794450
Mixer with top outlet M ^{3/4} "	794400
Mixer with bottom outlet M ^{1/2} "	794470

Grid 100 × 100mm	682001UK
------------------	----------

Bright pol. 304 st. steel	4042P
Pol. satin 304 st. steel	4042S
White powder-coated 304 stainless steel	4042W

Rain-effect	30250
Push-fit connector M24/125	820125

Shower area | time flow

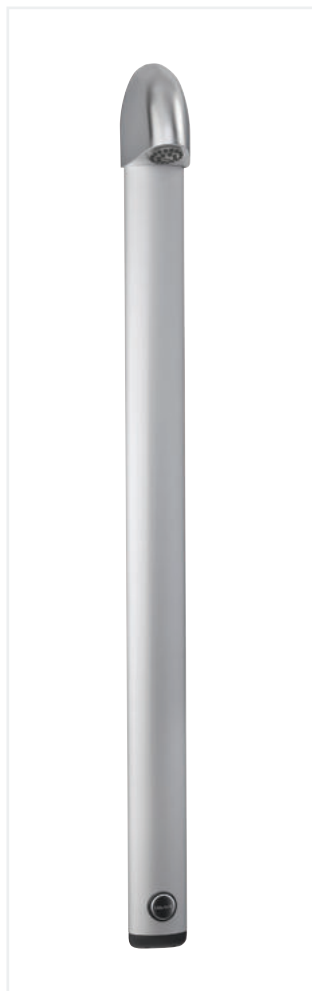

Time flow shower panel SPORTING 2

- ◆ Soft-touch operation
- ◆ Time flow ~30 seconds
- ◆ Anodised aluminium and chrome-plated satin finish
- ◆ Adjustable connector for top or back inlets
- ◆ Slimline structure with concealed fixings
- ◆ Tamperproof fixed shower head with automatic flow rate regulation
- ◆ Flow rate 6 lpm at 3 bar
- ◆ Accessible filter and non-return valve
- ◆ Integrated stopcock
- ◆ M $\frac{1}{2}$ " connection for mixed water supply

Rain-effect	714700DP
Scale-resistant nozzle	714700



Thermostatic mixing valve PREMIX COMPACT

- ◆ For 2 to 10 points-of-use (depending on the flow rate)
- ◆ Anti-scalding safety: automatic shut-off if cold or hot water supply fails
- ◆ Adjustable temperature 30 to 60°C, can be blocked by the installer
- ◆ Filters and non-return valves
- ◆ Minimum flow rate to operate: 5 lpm
- ◆ Thermal shocks are possible

M $\frac{1}{2}$ " for 2 to 7 showers from 5 to 20 lpm	733015
M $\frac{3}{4}$ " for 2 to 10 showers from 5 to 25 lpm	733020



Soap dish

- ◆ Robust model
- ◆ Concealed fixings
- ◆ Dimensions: 60 × 160 × 40mm

Matte chrome-plated Bayblend®	710500
Bright chrome-plated Bayblend®	710501


Shower area | time flow

NEW



Time flow shower column OUTDOOR

- ◆ Soft-touch operation
- ◆ Time flow ~30 seconds for the shower head and ~7 seconds for the foot-rinse
- ◆ Anodised aluminium shower column ready to fit
- ◆ Bottom inlet via in-line stopcock F $\frac{3}{4}$ "
- ◆ TEMPOSOFT 2 time flow valves for mixed water supply
- ◆ Chrome-plated, tamperproof, scale-resistant ROUND shower heads with automatic flow rate regulation at 6 lpm at 3 bar
- ◆ Can easily be protected or taken apart in winter
- ◆ Access panel with isolation valve and purge
- ◆ Filter

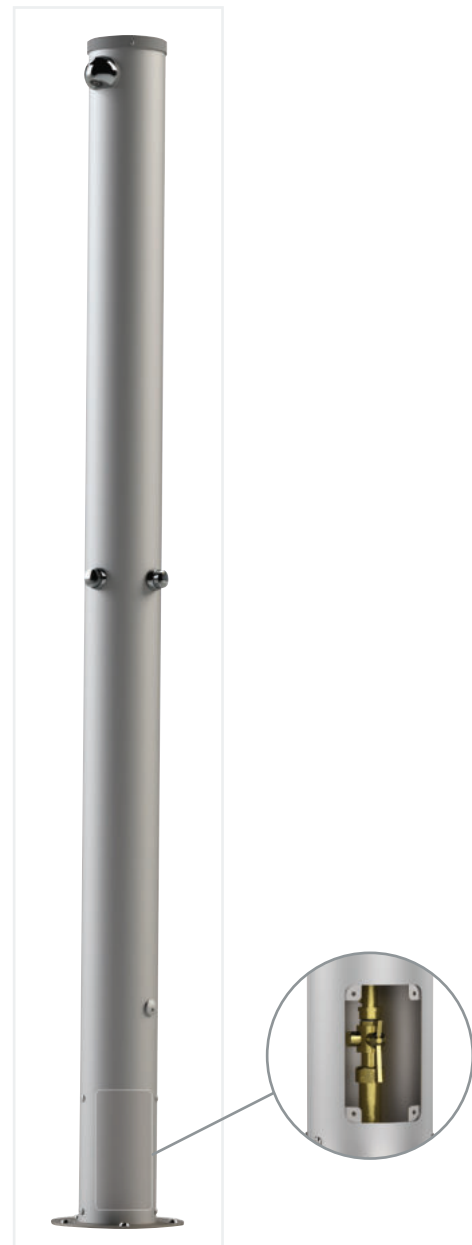

One shower	717510
One shower and foot-rinse	717511
Two showers	717520
Two showers and one foot-rinse	717521
Four showers	717540



TEMPOFIX 3 frame system with TEMPOMATIC 4 electronic urinal valve

- ◆ Black powder-coated steel frame for wall-mounted installation
- ◆ Fixes to load-bearing walls
- ◆ Adjustable frame height
- ◆ Adjustable centres, 95 to 280mm
- ◆ For walls up to 120mm
- ◆ Fitted with TEMPOMATIC 4 F½" electronic valve:
 - Mains supply 230/6V
 - Wall plate 145 × 145mm with integrated electronics
 - Infrared presence detection sensor
 - Waterproof recessed housing
 - 3 rinsing programmes
 - High-frequency mode (exclusive to DELABIE)
 - Hygienic duty flush every 24 hours (can be adjusted to 12 hours or OFF) after last use: prevents vacuums
 - Flow rate pre-set at 0.15 L/sec at 3 bar, can be adjusted

Bright polished finish stainless steel	543000 + 430010
Satin finish stainless steel	543000 + 430000
White powder-coated finish stainless steel	543000 + 430020
Black tempered glass	543000 + 430030



Electronic valve TEMPOMATIC 4

- ◆ No manual contact: infrared presence detection sensor
- ◆ Battery-operated with integrated 6V Lithium battery
- ◆ Integrated reduced-stagnation solenoid valve and electronic unit
- ◆ 3 rinsing programmes
- ◆ High-frequency mode (exclusive to DELABIE)
- ◆ Hygienic duty flush every 24 hours after the last use: prevents vacuums
- ◆ Flow rate 0.15 L/sec at 3 bar, can be adjusted
- ◆ Integrated stopcock and flow rate adjuster
- ◆ M½" connection

In-line (outlet M½")	479410
Angled (outlet M½")	479411
Angled with neck tube and connection washer Ø 35mm	479412



Ceramic urinal DELTACÉRAM

- ◆ Wall-hung, rimless, ceramic urinal
- ◆ Recessed or exposed water inlet
- ◆ Recessed or exposed waste outlet. Concealed trap
- ◆ Supplied with trap and fixing elements
- ◆ CE marked. Complies with European standard EN 13407 for 2L flush
- ◆ Weight: 11.5kg

Urinal only - Recessed inlet	134718
Urinal only - Exposed inlet	134118
EASY-D urinal pack with TEMPOSOFT 2 angled time flow urinal valve	133888
EASY-D urinal pack with TEMPOSOFT 2 in-line time flow urinal valve	133788



Time flow valve
TEMPOFLUX

- ◆ Soft-touch operation
- ◆ Time flow ~3 seconds
- ◆ Flow rate pre-set at 0.15 L/sec at 3 bar, can be adjusted to 0.3 L/sec
- ◆ Vacuum breaker
- ◆ Innovative stopcock and flow rate adjustment system integrated in the wall plate (patented)
- ◆ Complies with European standard EN 12541 (class II acoustic level)
- ◆ Chrome-plated solid brass body M1/2"



Time flow valve
TEMPOSOFT 2

- ◆ Soft-touch operation
- ◆ Time flow ~3 seconds
- ◆ Flow rate pre-set at 0.15 L/sec at 3 bar, can be adjusted
- ◆ Chrome-plated solid brass body M1/2"



Stainless steel urinal
FINO

- ◆ Wall-hung rimless urinal in bacteriostatic 304 stainless steel. Polished satin finish
- ◆ Quick and easy to install from the front thanks to a stainless steel mounting frame
- ◆ Recessed or exposed water inlet
- ◆ Recessed or exposed waste outlet. Concealed trap
- ◆ Supplied with trap and fixing elements
- ◆ CE marked. Complies with European standard EN 13407 for 2L flush
- ◆ Weight: 3.5kg



Urinal divider
LISO

- ◆ Bacteriostatic 304 stainless steel. Polished satin finish
- ◆ Smooth surface and rounded edges
- ◆ Concealed fixings
- ◆ Supplied with fixing elements
- ◆ Weight: 8kg for the H. 700mm model and 13kg for the H. 950mm model

For urinals with exposed supply Ø 35mm	778755
For DELABIE DELTA urinals	778757
For DELABIE FINO urinals	778759

Exposed	
Straight for in-line inlets	777800
Angled for recessed inlets	778800
Recessed	
Recessed behind a wall plate Polished st. steel Ø 130mm	777130
To mount on panels without a wall plate	777140

Recessed water inlet	135710
Exposed water inlet	135110

H. 700mm	100590
H. 950mm	100600



Electronic valve Dual control TEMPOMATIC

- WC direct flush
- No manual contact: voluntary activation (anti-blocking push-button) or automatically when the user leaves
- Recessed waterproof housing
- Adjusts to all types of installation (rails, solid walls, panels)
- Stopcock and flow rate adjustment, activation and electronic unit are all integrated and accessible from the front
- "Intelligent" automatic rinsing: flush volume adapts according to use
- 3 rinsing programmes
- Hygienic duty flush

Battery-operated	464PBOX + 464006
Mains supply	464SBOX + 464000



Wall-hung WC WCeram S

- Ceramic
- Rimless pan for easy cleaning and better hygiene
- Works with a cistern or a direct flush WC system
- Shrouded WC pan
- Holes for fixing toilet seat
- CE marked. Complies with European standard EN 997

L. 525mm	112518
Slimline white toilet seat	102629



Wall-mounted toilet brush set with cover

- Bacteriostatic 304 stainless steel
- Easy to clean: plastic bowl can be removed from above
- Plastic bowl with reservoir: prevents toilet brush sitting in residual water
- Toilet brush automatically centres itself in the holder
- Anti-theft lock
- Dimensions: Ø 90 × 410mm
- Stainless steel thickness: 1mm body

Bright polished 304 st. steel	4051P
Polished satin 304 st. steel	4051S
White powder-coated 304 stainless steel	4051EW
Matte black powder-coated 304 stainless steel	4051BK



Toilet roll holder Large model

- Bacteriostatic 304 stainless steel
- Model for 400m rolls
- Standard DELABIE lock and key
- With back-piece: protects the paper from wall imperfections, damp and dust
- Level control
- Concealed fixings

Polished satin 304 st. steel	510910S
Matte black powder-coated 304 stainless steel	510910BK



NEW



TEMPOFIX 3 frame system with TEMPOFLUX 3 time flow valve

- WC direct flush
- Self-supporting black powder-coated steel frame system (or wall-mounted with wall fixings)
- Frame height can be adjusted from 0 to 200mm (with 1m mark)
- Soil pipe Ø 100mm
- For walls up to 120mm
- Fitted with TEMPOFLUX 3 F¾" time flow direct flush valve:
 - Recessed waterproof housing
 - Soft-touch operation
 - Dual flush 3L/6L, can be adjusted to 2L/4L
 - AB anti-blocking system
 - Acoustic level complies with European standard EN 12541 class II



Chrome-plated metal wall plate 170 x 170mm	
Self-supporting model	564065DE + 763040
Wall-mounted model	564060DE + 763040
Satin finish stainless steel wall plate 210 x 162mm	
Self-supporting model	564065DE + 763000
Wall-mounted model	564060DE + 763000



Time flow valve TEMPOFLUX 2

- WC direct flush
- Dual flush 3L/6L, can be adjusted to 2L/4L
- Soft-touch operation
- Vacuum breaker
- Integrated stopcock and flow rate/flush volume adjuster
- Solid brass body
- In-line inlet M¾"
- Outlet connection for PVC tube Ø 26/32mm
- Acoustic level complies with European standard EN 12541 class II

Recessed in a versatile housing	
Recessing depth adjusts from 0 - 20mm	762902
Cross wall	
Cross wall control, cut-to-size, for walls ≤ 140mm	762150



Wall-hung WC pan S21 S and 700 S

- Bacteriostatic 304 stainless steel. Polished satin finish
- Easy to clean: WC bowl surface is polished and seam-free, with rounded edges
- Water savings: works with 4L or more of water
- Shrouded WC pan
- Quick and easy to install from the front thanks to a stainless steel mounting frame
- CE marked. Complies with European standard EN 997

L. 535mm	110310
L. 700mm - Disabled	110710



Time flow thermostatic dual control shower panel SECURITHERM

- ◆ Time flow valve ~30 seconds with soft-touch operation
- ◆ Anodised aluminium shower panel for wall-mounted, exposed installation
- ◆ SECURITHERM thermostatic mixer
- ◆ Adjustable temperature control from cold water up to 38°C with 1st limiter set at 38°C and 2nd limiter set at 41°C
- ◆ Anti-scalding failsafe: automatic shut-off if cold water fails
- ◆ Anti-cold showers function: automatic shut-off if hot water fails
- ◆ Thermal shocks are possible
- ◆ Chrome-plated, tamperproof, scale-resistant ROUND shower head with automatic flow rate regulation at 6 lpm at 3 bar
- ◆ Handset with removable flexible via push-fit rapid STOP connector and wall support supplied
- ◆ M $\frac{1}{2}$ " connection
- ◆ Filters and non-return valves

Top inlet via in-line stopcocks	792320
Concealed inlet via flexibles	792330



Grab bar 135° Basic

- ◆ White powder-coated stainless steel
- ◆ Concealed fixings
- ◆ Ø 32mm
- ◆ Maximum user weight: 135kg
- ◆ CE marked

135° - 400 x 400mm	35082W
Straight - 300mm	35050W
Straight - 400mm	350504W
Straight - 500mm	350505W
Straight - 600mm	350506W
Drop-down - 760mm	511516W
Drop-down with leg 760mm	511517W



Lift-up ALU shower seat

- ◆ Large plastic slats, comfortable and easy to maintain
- ◆ Reinforced with folding guided leg
- ◆ Wall-mounted with concealed fixings
- ◆ Height: 480mm
- ◆ Maximum user weight: 135kg
- ◆ CE marked


ALU seat - L. 360mm	510400
Large ALU seat - L. 465mm	510410



Electronic valve
TEMPOMATIC

- ♦ WC direct flush
- ♦ No manual contact: infrared presence detection sensor
- ♦ Voluntary activation (by nearing hand) or automatic when the user leaves
- ♦ Mains supply with 1" solenoid valve
- ♦ Transformer 230/12V
- ♦ IP65 independent electronic unit
- ♦ For cross wall installation
- ♦ Time flow ~7 seconds, can be adjusted from 3 to 12 seconds
- ♦ Detection distance, flow rate and flush volume can be adjusted
- ♦ Stopcock

For walls ≤ 30mm	463030
For walls ≤ 160mm	463150



Grab bar 135°
UltraPolish stainless steel

- ♦ Bacteriostatic 304 stainless steel
- ♦ Non-porous uniform surface for easy maintenance and hygiene
- ♦ 40mm gap between the bar and the wall prevents the forearm passing, reducing the risk of fracture in case of loss of balance
- ♦ Concealed fixings
- ♦ Ø 32mm
- ♦ Maximum user weight: 135kg
- ♦ CE marked

135° - 400 x 400mm	5082P
Straight - 300mm	5050P2
Straight - 400mm	50504P2
Straight - 500mm	50505P2
Straight - 600mm	50506P2



Drop-down grab bar
UltraPolish stainless steel

- ♦ Bacteriostatic 304 stainless steel
- ♦ Non-porous uniform surface for easy maintenance and hygiene
- ♦ Allows side access in the raised position
- ♦ Retained in upright position
- ♦ Slowed down descent
- ♦ Concealed fixings secured by a 4mm thick 304 stainless steel plate
- ♦ Ø 32mm
- ♦ Maximum user weight: 135kg
- ♦ CE marked

Drop-down - L. 650mm	510160P
Drop-down with leg L. 650mm	510162P
Drop-down - L. 850mm	510164P
Drop-down with leg L. 850mm	510170P



Wall-mounted toilet brush set

- ♦ Bacteriostatic 304 stainless steel
- ♦ Long, ergonomic handle: easy for wheelchair users or people who have difficulty bending to use
- ♦ Easy to clean: plastic bowl can be removed from above
- ♦ Plastic bowl with reservoir: avoids toilet brush sitting in residual water and reduces the risk of splashing when next used
- ♦ Toilet brush automatically centres itself in the holder
- ♦ Anti-theft lock
- ♦ Dimensions: Ø 90 x 580mm
- ♦ Stainless steel thickness: 1mm body

Bright polished 304 st. steel	510051P
Polished satin 304 st. steel	510051S
White powder-coated 304 stainless steel	510051W


Utility area | Washing-up / Laundry



Time flow mixer TEMPOMIX 3

- ◆ Soft-touch operation
- ◆ Temperature control and operation via the push-button
- ◆ Time flow ~7 seconds
- ◆ Flow rate pre-set at 3 lpm at 3 bar, can be adjusted from 1.4 - 6 lpm
- ◆ Scale-resistant flow straightener
- ◆ Chrome-plated solid brass body M1/2"
- ◆ Fixed or swivel spout
- ◆ Filters and non-return valves
- ◆ Adjustable maximum temperature limiter
- ◆ M1/2" offset connectors for centres from 130 to 170mm

Swivel spout L. 150mm	794350
Fixed spout L. 150mm	794360
Short fixed spout	794370

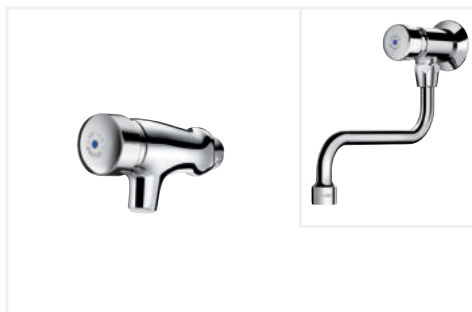

Time flow tap TEMPOSTOP

- ◆ Time flow ~15 seconds (suitable for wash tubs) or 7 seconds
- ◆ Flow rate pre-set at 3 lpm at 3 bar, can be adjusted from 1.4 to 6 lpm
- ◆ Tamperproof scale-resistant flow straightener
- ◆ Chrome-plated solid brass body
- ◆ Available with AB anti-blocking system: water will flow only when the push-button is released

Time flow ~ 15 sec	
M1/2", swivel spout L. 150mm	748151
Time flow ~ 7 sec	
M1/2"	746000
M1/2" with plate	746292
M1/2" and AB system	746001



Wall-mounted disposal sink

- ◆ Bacteriostatic 304 stainless steel. Polished satin finish
- ◆ Smooth surface for easy cleaning
- ◆ Hinged stainless steel bucket grid
- ◆ Without overflow
- ◆ Supplied with fixing elements
- ◆ Weight: 5.1kg

Wall-mounted disposal sink	180170
----------------------------	--------



Mixer 100 lpm

- ◆ Swivelling tubular spout Ø 22mm H. 650mm L. 300mm with star-shaped, brass flow straightener
- ◆ Guided valve heads with reinforced mechanisms
- ◆ Shock-resistant, ergonomic ball levers
- ◆ Flow rate 100 lpm at 3 bar
- ◆ Full flow rate within half a turn
- ◆ Chrome-plated brass body and spout
- ◆ Soldered copper pipe water inlets
- ◆ Reinforced fixings

100 lpm mixer with riser column	5612
100 lpm mixer	5610



Pre-rinse set

- ◆ Single hole deck-mounted mixer with slimline control lever
- ◆ Bib tap with swivelling, tubular spout L. 200mm:
 - valve head with reinforced mechanism and ergonomic control
 - 16 lpm full flow rate achieved within 90° turn
- ◆ Black scale-resistant hand spray M1½" with adjustable jet and 9 lpm flow rate at the outlet
- ◆ Reinforced, food-grade black flexible hose L. 0.95m
- ◆ ¾" brass column, adjustable wall bracket and stainless steel spring guide

With bib tap	5625
Without bib tap	5626



Hand washbasin SXS

- ◆ Electronic or knee-operated
- ◆ Maximum hygiene: no manual contact with tap
- ◆ Bacteriostatic 304 stainless steel. Polished satin finish
- ◆ Water savings: flow rate pre-set at 3 lpm
- ◆ Electronic: WRAS approved tap, TMV3 and WRAS approved thermostatic mixer, chrome-plated brass soap dispenser
- ◆ Mechanical: swan-neck spout, soft-touch operation time flow tap and pre-mixer
- ◆ CE marked. Complies with European standard EN 14688

Electronic hand washbasin	
Without splashback	18431015
With splashback	18432015
Mechanical hand washbasin	
Without splashback	182310
With splashback	182320



Wall-mounted paper towel dispenser





- ◆ Bacteriostatic 304 stainless steel
- ◆ With lock and standard DELABIE key
- ◆ Level control
- ◆ Dispenses one sheet at a time
- ◆ Capacity: 500 sheets
- ◆ Dimensions: 120 × 275 × 360mm
- ◆ Paper towel dimensions: open format 230 × 250mm, closed format 115 × 250mm

Bright polished 304 st. steel	510601S
Polished satin 304 st. steel	510601P
White powder-coated 304 stainless steel	510601W



AVAILABLE DOCUMENTS:

- DOC 609UK:** Water Controls for Public and Commercial Places
- DOC 950UK:** Accessibility and Independence - Hygienic Accessories for Public and Commercial Places
- DOC 900UK:** Water Controls for Healthcare Facilities and Retirement Homes
- DOC 750UK:** Stainless Steel Sanitary Ware
- DOC 200UK:** Water Controls for Professional Catering

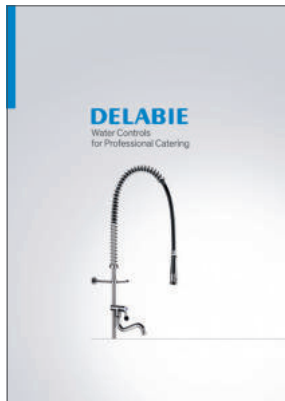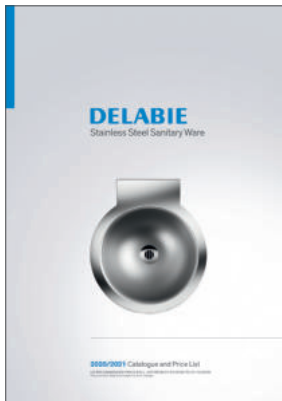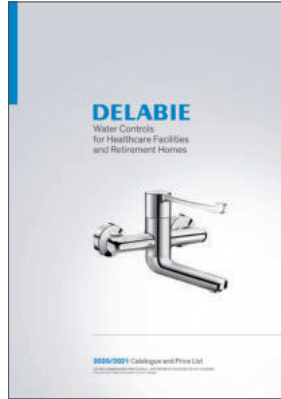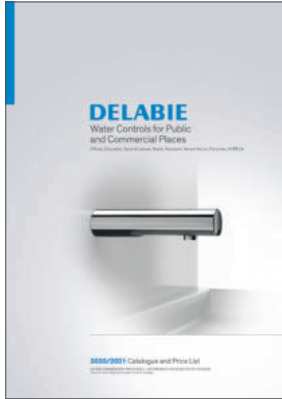

DOC 205UK - 04/2022

DELABIE

DELABIE UK Ltd
Henderson House, Hithercroft Road,
Wallingford, Oxon, OX10 9DG

DELABIE UK Ltd Reg No: 1764854 England

delabie.co.uk

